

# GLOBAL SYN-TI

### **Product Specification Sheet**

## U Blade-80





#### R USES


- Landscape
- Lawns
- **Playgrounds**
- **Traffic Medians**
- Pet Areas
- Commercial or Residential
- Light-Heavy Traffic



15 Year Manufacturer's Warranty 8 Year Manufacturer's High Traffic Warranty



Flo-Rite Drainage Technology

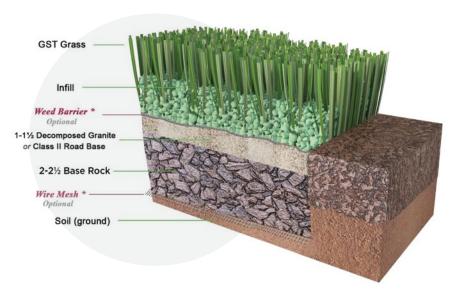

#### **U-BLADE**

## **SPECIFICATIONS**

Pile Height: 1-7/8"

Turf Gauge: 3/8"

Face Weight: 80 oz./yd<sup>2</sup>

Backing Weight: 27 oz./yd<sup>2</sup>

Total Weight: 107 oz./yd<sup>2</sup>

Stitch Rate: 17/10cm

Stitches/M2: 17850

Material/Dtex: PE10800 + PP3500

Color: Emerald Green and Olive Green with

**Brown and Green Thatching** 

Type Of Fiber: **PE Monofilament and PP Curled** 

As Thatch

Infill Amount: 1.0 lb./psf.

Primary Backing: Premium GST Backing

Tuft Bind: 11 lb/force (ASTM D1335)

Blade Type: **U-Blade** 

Permeability: 59.4 inches/hr. (ASTM F1551)

Melting Point: 176 °F (ASTM D2859)

Grab Tear MD: >200 lb./force (ASTM D5034)

Grab Tear CMD: >200 lb./force (ASTM D5034)

Roll Width: 15 ft

Roll Length: 100 ft

Sq. Ft. Per Roll: 1500

Total Roll Weight: 1130 lbs





